


SMARTVIDE X 230/50-60/1

Maximum capacity: 56 lt./ 14 gal.





- Infuses and flavors oil, fat or other products applying the controlled temperature technique.
- The possibility of probe activated cycle start is a crucial function for pasteurization
- The possibility of connecting SmartVide X to an enhanced tank reduces heating time. This function is specially useful when cooking or retherming very cold or frozen food.
- ✓ Increases profits due to lack of product shrink.Requires very little hands-on time, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. The interactive full-color touchscreen offers all information at a glance and makes operation extremely intuitive. In addition, thanks to the connectivity, an exchange of important data is allowed to improve the performance of the Chef.
- SmartVideX offers a complete settings menu , accessible through its touch screen.
- Portable: thanks to their thick, stainless steel, ergonomic handle, SmartVide can be taken from a container to another easily. Additionally, the bag supplied with the circulator allows easy transport - wherever the Chef goes.
- HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle. Furthermore, the cooking data be consulted on the interactive touch screen at any time during the cycle.
- V Your appliance, always updated: free firmware update, no matter where the appliance is with no need of additional appliances.

NCLUDES

- Janby Track Mini (must be activated).
- ✓ Transport bag.

ACCESSORIES

- Needle Probe for sous-vide cookers
- Probe Foam Seal
- Insulated tank for SmartVide immersion circulator

Lid for SmartVide insulated

- Heated tank for SmartVide X
 - Spacer bases for containers

Floating balls for SmartVide

Smooth bags for sous-vide

SmartVide transport bag

Tank dividers

cookina

Temperature

SPECIFICATIONS

tanks

Display precision: 0.01 °C Range: 5 ℃ - 95 ℃ Permissible ambient temperature: 5 °C - 40 °C

Time Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 56 l Total loading: 2000 W Electrical supply:230 V / 50-60 Hz / 1 ~ Plua: EU (SCHUKO 2P+G)
 Submergible part dimensions: 117 mm x 110 mm x 147 mm



sammic

SALES DESCRIPTION

user-friendly, portable.

HACCP-ready.

Firmware update.

5" colour touch screen.

to obtain extremely consistent results.

tely after cooking to enhance flavors.

controlled by the core probe temperature.

probe.

performance.

Interchangeable between °C and °F."

Bluetooth / WIFI connectivity.

Commercial high-precision sous-vide cooker. Reliable,

Optional core probe and temperature control by core

Portable precision cooker with stirrer for up to 56 lt. / 14

gal. containers. Deisgned for chefs, developed with chefs.

The thick stainless steel, robust construction guarantees commercial

SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and

texture. Equipped with a highly precise temperature control system

when standardizing recipes. Recipes can be set and the SmartVide

✓ Allows cooking food in their own juice and using this juice immedia-

✓ The **optional core probe** allows for an even more precise control

www.sammic.co.uk

Food Service Equipment Manufacture Unit 2 Trevanth Road Troon Industrial Park LE4 9LS - Leicester

Tel.: +44 0116 246 1900

uksales@sammic.com



Project	Date	sheet
Item	Qty	
Approved		product


FOOD PRESERVATION AND SOUS-V


ipdated **26/01/2022**



Maximum capacity: 56 lt./ 14 gal.

External dimensions (WxDxH): 125 mm x 148 mm x 385 mm Net weight: 4.4 Kg **Crated dimensions** 440 x 190 x 310 mm Gross weight: 6 Kg 1180160

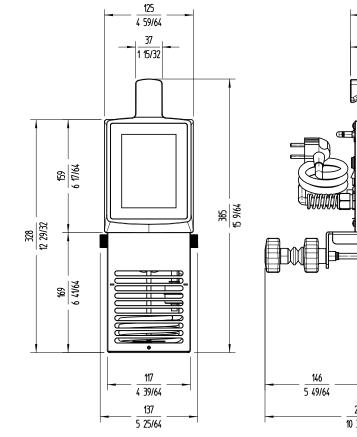

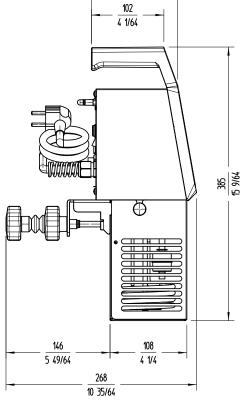

121

4 49/64



Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900

www.sammic.co.uk



Project Date
Item Qty

Approved

product sheet updated 26/01/2022